



amtico  
form

## Enhanced by Nature

**Highly tactile  
LVT flooring**

---

Authentic Wood  
& Stone designs

---

0.7 mm wear layer

# Contents

What is Form?	4
Woods	10
Stones	34
Form Planks and Tiles	44
Laying Patterns	46
Projects	52
Technical Information	56

---

# Enhanced by Nature

Amtico Form brings working spaces to life.

With the tactile power of natural, hand-worked materials and the unrivalled performance of premium LVT – Amtico Form’s raw textures and myriad tones will transform your experience of commercial environments.

30 Woods  
6 Stones  
3 Textures

---



12YR COMMERCIAL  
WARRANTY




## Why choose Amtico Form?

The idea behind Amtico Form is simple. It looks like natural wood and stone while still performing effortlessly as LVT. It offers specifiers charm, character, and the tactile beauty of natural materials. Crafted with the hard-wearing quality and pure usability you've come to expect from our products, to elevate and enhance any environment.



### Bring the outside in

Biophilic design is a guiding force for commercial spaces, with the built environment drawing us ever closer to nature. Form is created in the spirit of this movement – harnessing the interplay of colour, diffused light and deeply tactile surface textures.



### Natural aesthetics


By studying the intricacies of natural wood and stone, interpreting the patterns formed by grain and weathering, our in-house designers have crafted a collection that is both natural in colour and texture.



### Capture a feeling, change the mood

With Form, you can connect people to the grain of wood, the solidity of stone, the subtle shift of surface textures as light changes throughout the day – bringing the outside in and improving the wellbeing of people within the space.\*

\* Tsunetsugu, Y., Y. miyazaki, & H. Sato (2007). Physiological effects in Humans Induced by the visual Stimulation of Room Interiors with Different Wood Quantities. Journal of Wood Science, 53 (1), 11-16.



### Certified for quality and wellbeing

With its hard-wearing 0.7 mm wear layer, this premium LVT is certified for use in education, healthcare, homes and offices – meeting VOC requirements for wellbeing and air quality across the globe.

<sup>1</sup> Acoustic backing available on all Form products except for Basket Weave, Barrel Oak, Pavestone and Hex designs.



# 3

Tactile Surface Textures

# 36


Woods & Stones

# 12

Year Warranty

# 0.7<sub>mm</sub>

Premium LVT

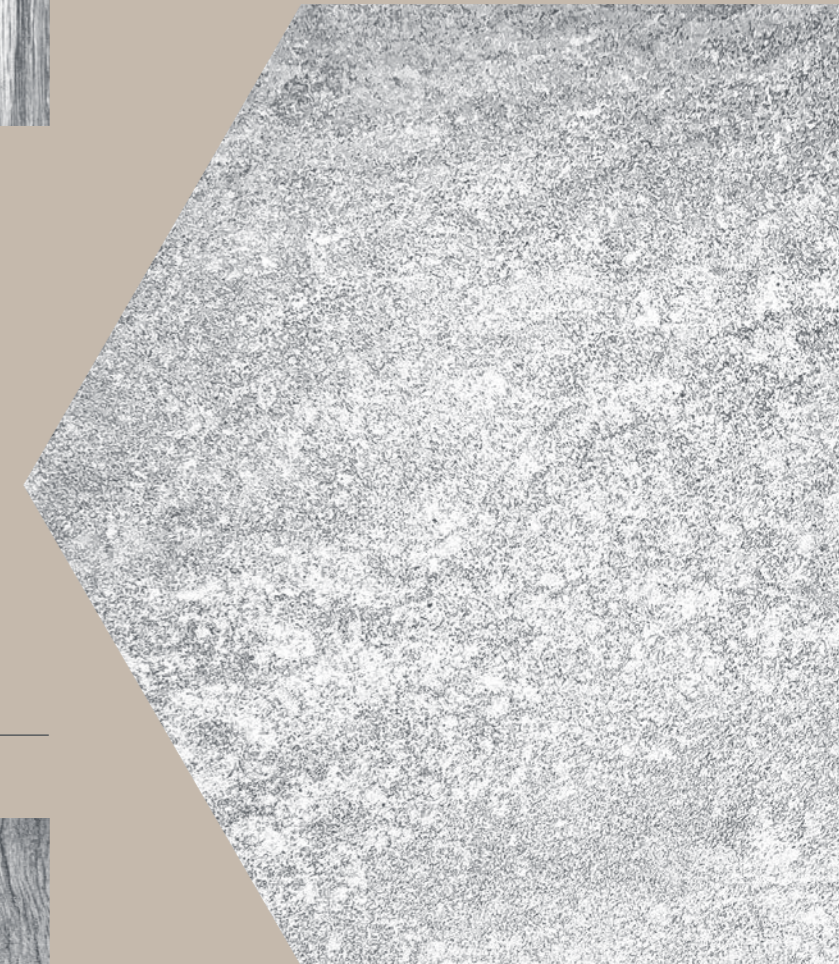

# 19

dB  
Acoustic Backing<sup>1</sup>



## Accentuating architecture

Our experience of an environment is highly influenced by the use of colours and textures within it. Through Form, we offer a practical way to harness the calming power of natural materials for hard-working commercial spaces.

### Multi-functional spaces

It's the new normal for commercial spaces to serve multiple functions. As a collection, Form can adapt to suit any space – with the combination of Wood and Stone creating a natural sense of flow, of movement and distinct zones.



Gotland Oak – Stripwood & Basket Weave FP101

### Creating mood

Amtico Form can contribute to the overall sensory experience of a room. As well as refined colours for visual stimulus, the subtle surface textures and the warmth of LVT underfoot also appeal strongly to the sense of touch.




Dimmet Oak – Stripwood

### Features and focal points

Combining the elegant, handcrafted nature of Form with a modern mix of laying patterns, Form can be both a highly-functional, hard-wearing floor and the focal point of your space.



Dusted Oak – Stripwood & Large Parquet FP143



Get creative with our Room Visualiser


Explore patterns and colours for your next project.

[amtico.com](https://www.amtico.com)





about

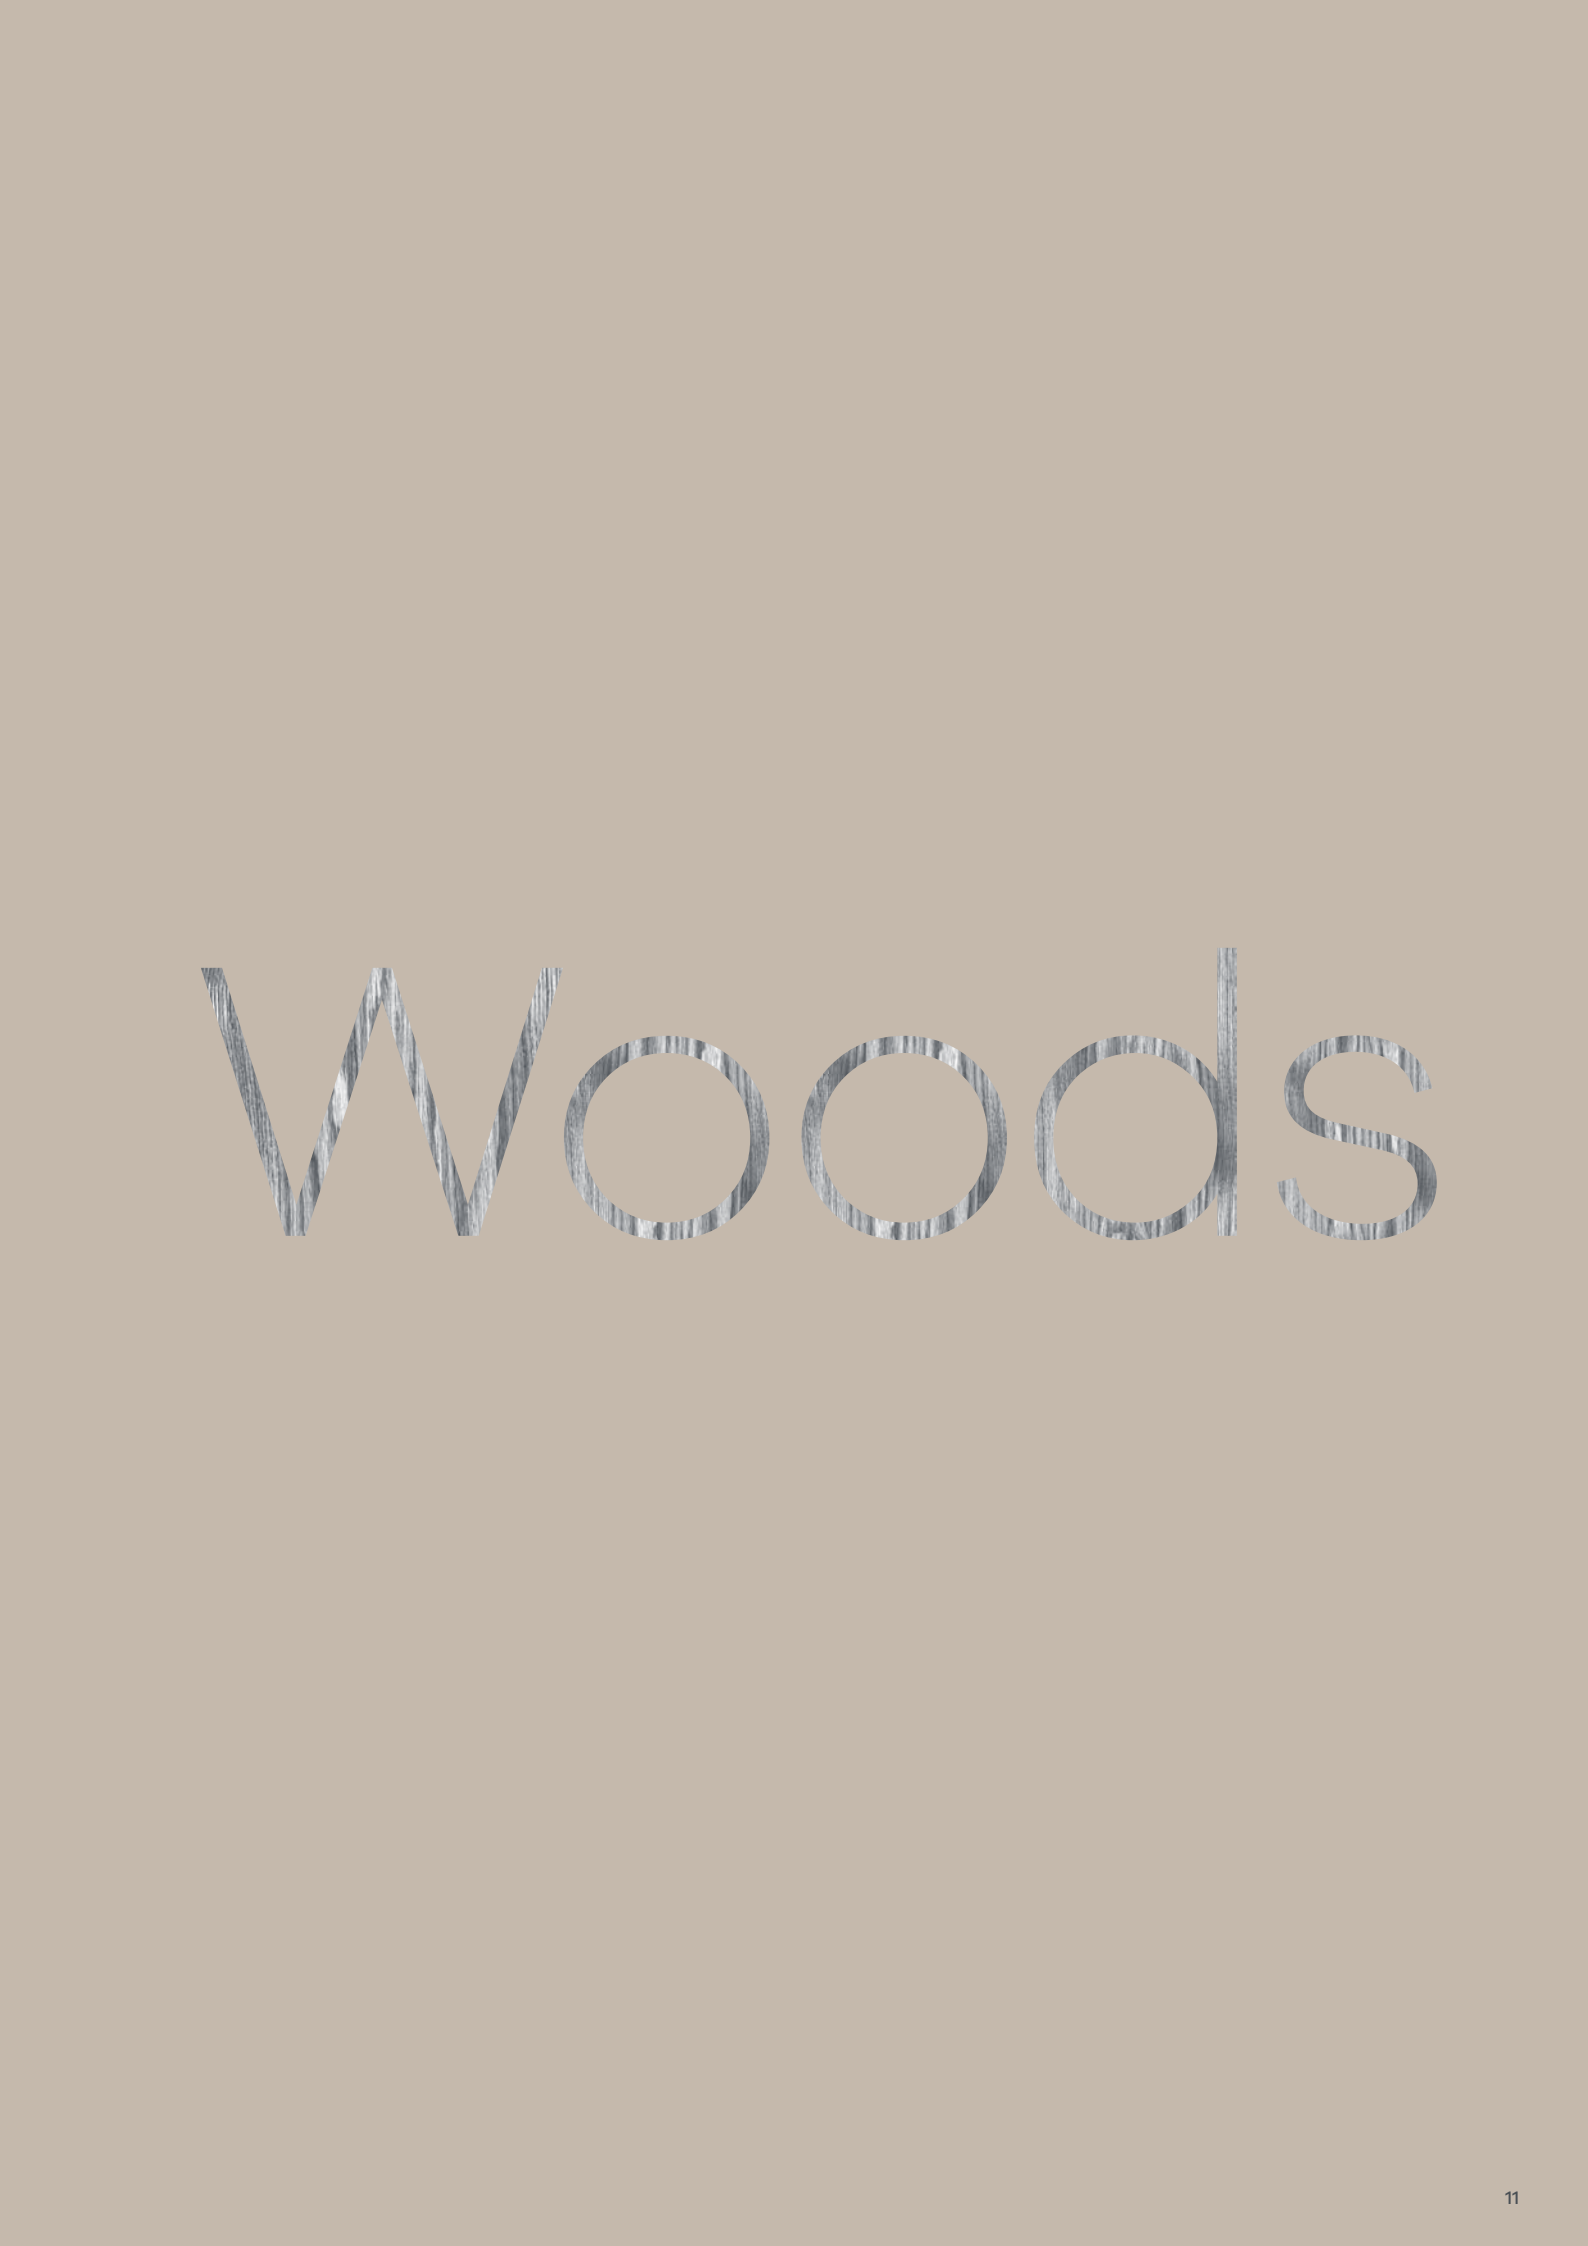

woods





Seaboard Oak – Herringbone Plank

## Cool Woods



**Seaboard Oak**  
FS7W8570

Seaboard Oak's dramatic elegance brings visual interest and warmth to this space without overpowering the main focus of the retail environment.

Surface Texture:  
Artisan Emboss


Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet

FP125

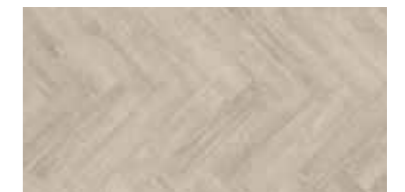

Large Parquet

FP148

19<sub>dB</sub>

Acoustic backing available on all options except for Basket Weave and Barrel Oak designs.

 Form is a dryback LVT product.

19<sub>ac</sub> Acoustic backing available on all options except for Barrel Oak designs, Basket Weave laying pattern & on orders with stripping.

Dusted Oak  
FS7W8520



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Drift Oak  
FS7W9020



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Barrel Oak Grey  
FK7W3300



Surface Texture:  
Natural Wood Grain Emboss

Plank Sizes:  
177.8 x 1219.2 mm (7 x 48")  
235.0 x 1505.0 mm (9.25 x 59.25")

Valley Oak  
FS7W9040



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Native Grey Wood  
FS7W9060



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Bister Oak  
FS7W8490



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet FP120



Large Parquet FP143

Also available in:



Small Parquet FP130



Large Parquet FP153



Order FREE samples.

Explore designs, hues and textures with our tactile sample swatches.

[amtico.com](http://amtico.com)

Also available in:



Small Parquet FP131




Large Parquet FP154



Basket Weave FP114

Also available in:

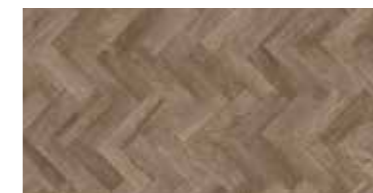


Small Parquet FP137



Large Parquet FP160

Also available in:

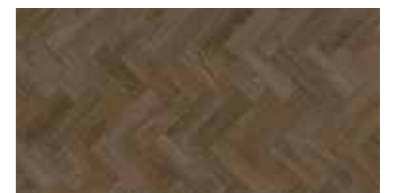

Small Parquet FP117



Large Parquet FP140



# Cool Woods

Burnished Timber  
FS7W9080



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Barrel Oak Ashen  
FK7W3309



Surface Texture:  
Natural Wood Grain Emboss

Plank Sizes:  
177.8 x 1219.2 mm (7 x 48")  
235.0 x 1505.0 mm (9.25 x 59.25")


Kalmar Oak  
FS7W8500



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Also available in:

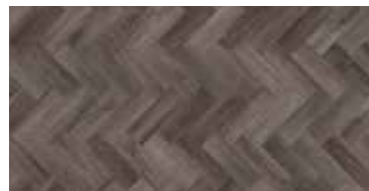

Small Parquet FP133



Large Parquet FP156




Get creative with our  
Room Visualiser


Explore patterns and  
colours for your next  
project.

[amtico.com](http://amtico.com)

Also available in:

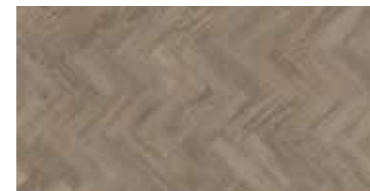

Small Parquet FP118

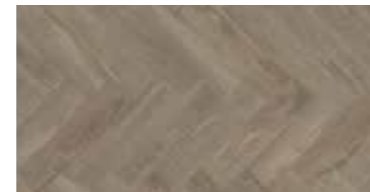

Large Parquet FP141



Basket Weave FP103



Kalmar Oak – Stripwood



## Natural Wood Grain Emboss

---

With their authentic grain texture, fresh, contemporary colours and usable plank sizes, Form's Natural Wood Grains bring the feel, the subtlety and the impact of real timber to your interior.

Experience  
smooth, refined  
timber.

Colours

---

7

---







Fawn Oak – Large Parquet FP139

## Neutral Woods



Fawn Oak  
FS7W8480



Fawn Oak's subtle warmth and light tones make for a bright, easy backdrop to a busy space like a bar or restaurant.

---

Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

---

Also available in:



Small Parquet

FP116



Large Parquet

FP139



Basket Weave

FP102



 Form is a dryback LVT product.

19<sub>dB</sub> Acoustic backing available on all options except for Barrel Oak designs, Basket Weave laying pattern & on orders with stripping.

Shell Oak  
FS7W8580



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Barrel Oak Cotton  
FK7W3302



Surface Texture:  
Natural Wood Grain Emboss

Plank Sizes:  
177.8 x 1219.2 mm (7 x 48")  
235.0 x 1505.0 mm (9.25 x 59.25")

Cowrie Oak  
FS7W8590



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Barrel Oak Rye  
FK7W3303



Surface Texture:  
Natural Wood Grain Emboss

Plank Sizes:  
177.8 x 1219.2 mm (7 x 48")  
235.0 x 1505.0 mm (9.25 x 59.25")

Bergen Oak  
FS7W8510



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")


Barrel Oak Smoke  
FK7W3308



Surface Texture:  
Natural Wood Grain Emboss

Plank Sizes:  
177.8 x 1219.2 mm (7 x 48")  
235.0 x 1505.0 mm (9.25 x 59.25")

Also available in:

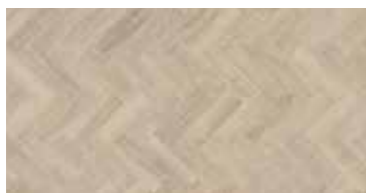

Small Parquet FP126



Large Parquet FP149



12YR COMMERCIAL WARRANTY

Also available in:



Small Parquet FP127



Large Parquet FP150



Basket Weave FP104

Also available in:



Small Parquet FP119



Large Parquet FP142



Order FREE samples.  
Explore designs, hues and textures with our tactile sample swatches.  
[amtico.com](http://amtico.com)



# Neutral Woods

Dimmet Oak  
FS7W8530



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Gotland Oak  
FS7W8470



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")


Strand Oak  
FS7W8620



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Also available in:

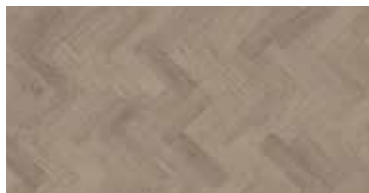

Small Parquet FP121




Large Parquet FP144

Also available in:



Small Parquet FP115

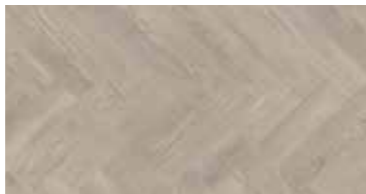

Large Parquet FP138



Basket Weave FP101

Also available in:



Small Parquet FP124



Large Parquet FP147



Strand Oak – Stripwood



## Artisan Emboss Wood

---

With their hand-scraped surface texture design, Form's Artisan Emboss Woods give you the dense detail you'd expect to find in time-worn, deeply weathered wood.


Discover  
time-worn  
grain.

Colours

---

23

---

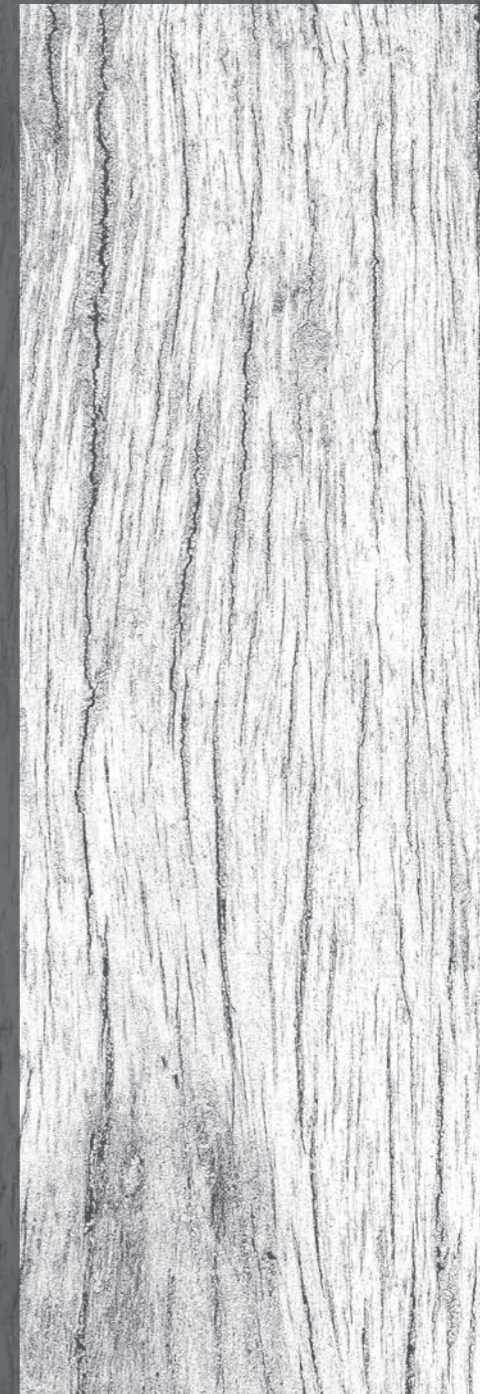





Skerry Oak – Stripwood

## Warm Woods



### Skerry Oak FS7W8610



This sun-kissed oak will add texture and warmth to any space, and works beautifully in combination with Hex to create zones with a contemporary feel.

---

Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

---

Also available in:



Small Parquet

FP129



Large Parquet

FP152

---

19<sub>dB</sub>

Acoustic backing available on all options except for Basket Weave and Barrel Oak designs.



# Warm Woods

 Form is a dryback LVT product.

Amber Oak  
FS7W8550



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Boardwalk Oak  
FS7W8600



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Eventide Oak  
FS7W8540



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet FP123



Large Parquet FP146

Also available in:



Small Parquet FP128



Large Parquet FP151

Also available in:



Small Parquet FP122



Large Parquet FP145



Eventide Oak – Large Parquet FP145 & plank border



# Warm Woods

19<sub>dB</sub> Acoustic backing available on all options except for Barrel Oak designs, Basket Weave laying pattern & on orders with stripping.

**Barrel Oak Dune**  
FK7W3307



Surface Texture:  
Natural Wood Grain Emboss

Plank Sizes:  
177.8 x 1219.2 mm (7 x 48")  
235.0 x 1505.0 mm (9.25 x 59.25")

**Rural Oak**  
FS7W5950



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

**Barrel Oak Sand**  
FK7W3304



Surface Texture:  
Natural Wood Grain Emboss

Plank Sizes:  
177.8 x 1219.2 mm (7 x 48")  
235.0 x 1505.0 mm (9.25 x 59.25")

**Carved Oak**  
FS7W5960



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

**Cottage Limed Wood**  
FS7W5940



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

**Bureau Oak**  
FS7W5970



Surface Texture:  
Artisan Emboss

Plank Sizes:  
152.4 x 914.4 mm (6 x 36")  
184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet FP134



Large Parquet FP157



Basket Weave FP105




12YR COMMERCIAL WARRANTY

Also available in:



Small Parquet FP135

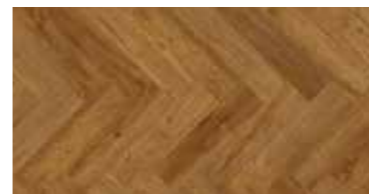


Large Parquet FP158



Basket Weave FP106

Also available in:

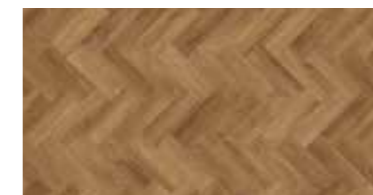

Small Parquet FP132



Large Parquet FP155


Also available in:



Small Parquet FP136



Large Parquet FP159



Get creative with our Room Visualiser

Explore patterns and colours for your next project.

amtico.com



stones

Stones



Form's palette of six stones is designed to replicate the beautiful variations found in stone, with a smooth, subtle surface texture that's closer to fine ceramic, and guaranteed to make a lasting impact.


Work with cool,  
contemporary  
stone.

Colours

---

6

---

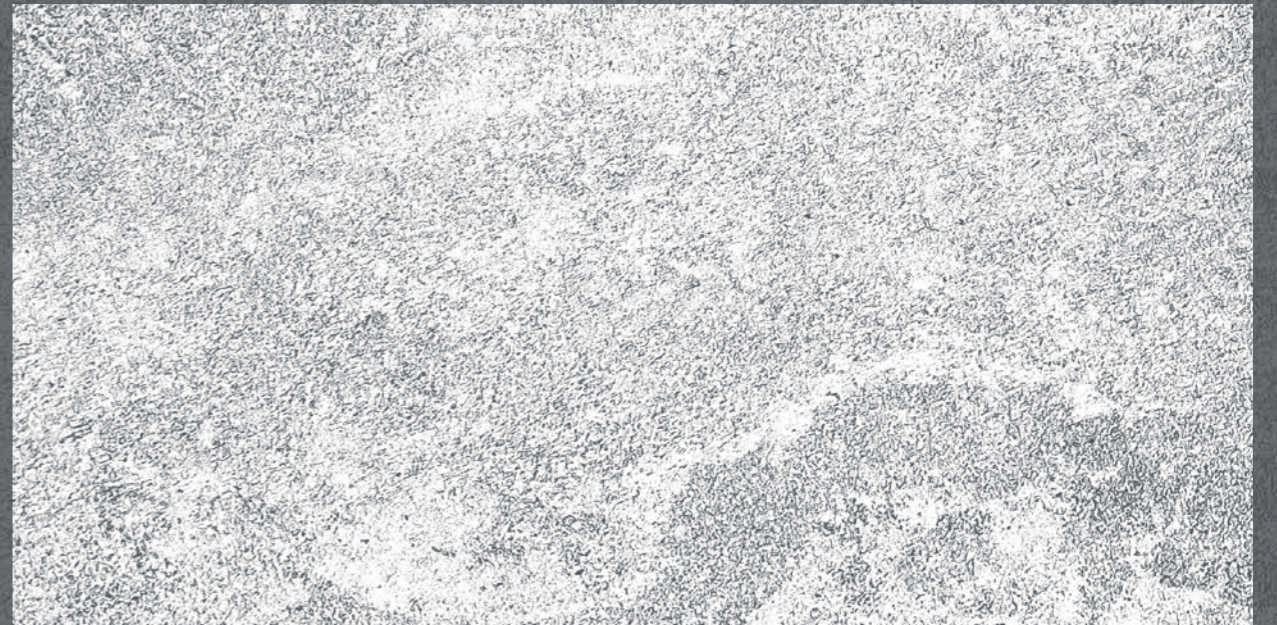





Opal – Hex FP112

## Stones



Opal  
FS7S4380



Subtle and complex, Opal is similar to both marble and granite in appearance – bringing calm and depth to your space.

---

Surface Texture:  
Ceramic Emboss

Tile Sizes:  
304.8 x 609.6 mm (12 x 24")

---

Also available in:



Hex

FP112



 Form is a dryback LVT product.

Sepia  
FS7S4390



Surface Texture:  
Ceramic Emboss

Tile Sizes:  
304.8 x 609.6 mm (12 x 24")

Mineral  
FS7S4350



Surface Texture:  
Ceramic Emboss

Tile Sizes:  
304.8 x 609.6 mm (12 x 24")

Cinder  
FS7S4400



Surface Texture:  
Ceramic Emboss

Tile Sizes:  
304.8 x 609.6 mm (12 x 24")

Tidal  
FS7S4340



Surface Texture:  
Ceramic Emboss

Tile Sizes:  
304.8 x 609.6 mm (12 x 24")

Also available in:



Pavestone with Concrete Pale stripping FP107



Hex FP164

Also available in:



Pavestone with Concrete Pale stripping FP110



Hex FP161

Also available in:



Pavestone with Stria Volcanic stripping FP108



Hex FP163

Also available in:



Pavestone with Stria Volcanic stripping FP109



Hex FP162





Crema  
FS7S4370



Crema's deliciously neutral tone evokes both marble and quarried stone, and works beautifully when combined with our wood palette.

---

Surface Texture:  
Ceramic Emboss

Tile Sizes:  
304.8 x 609.6 mm (12 x 24")

---

Also available in:




Pavestone with Stria Basalt stripping

FP111



Hex

FP113

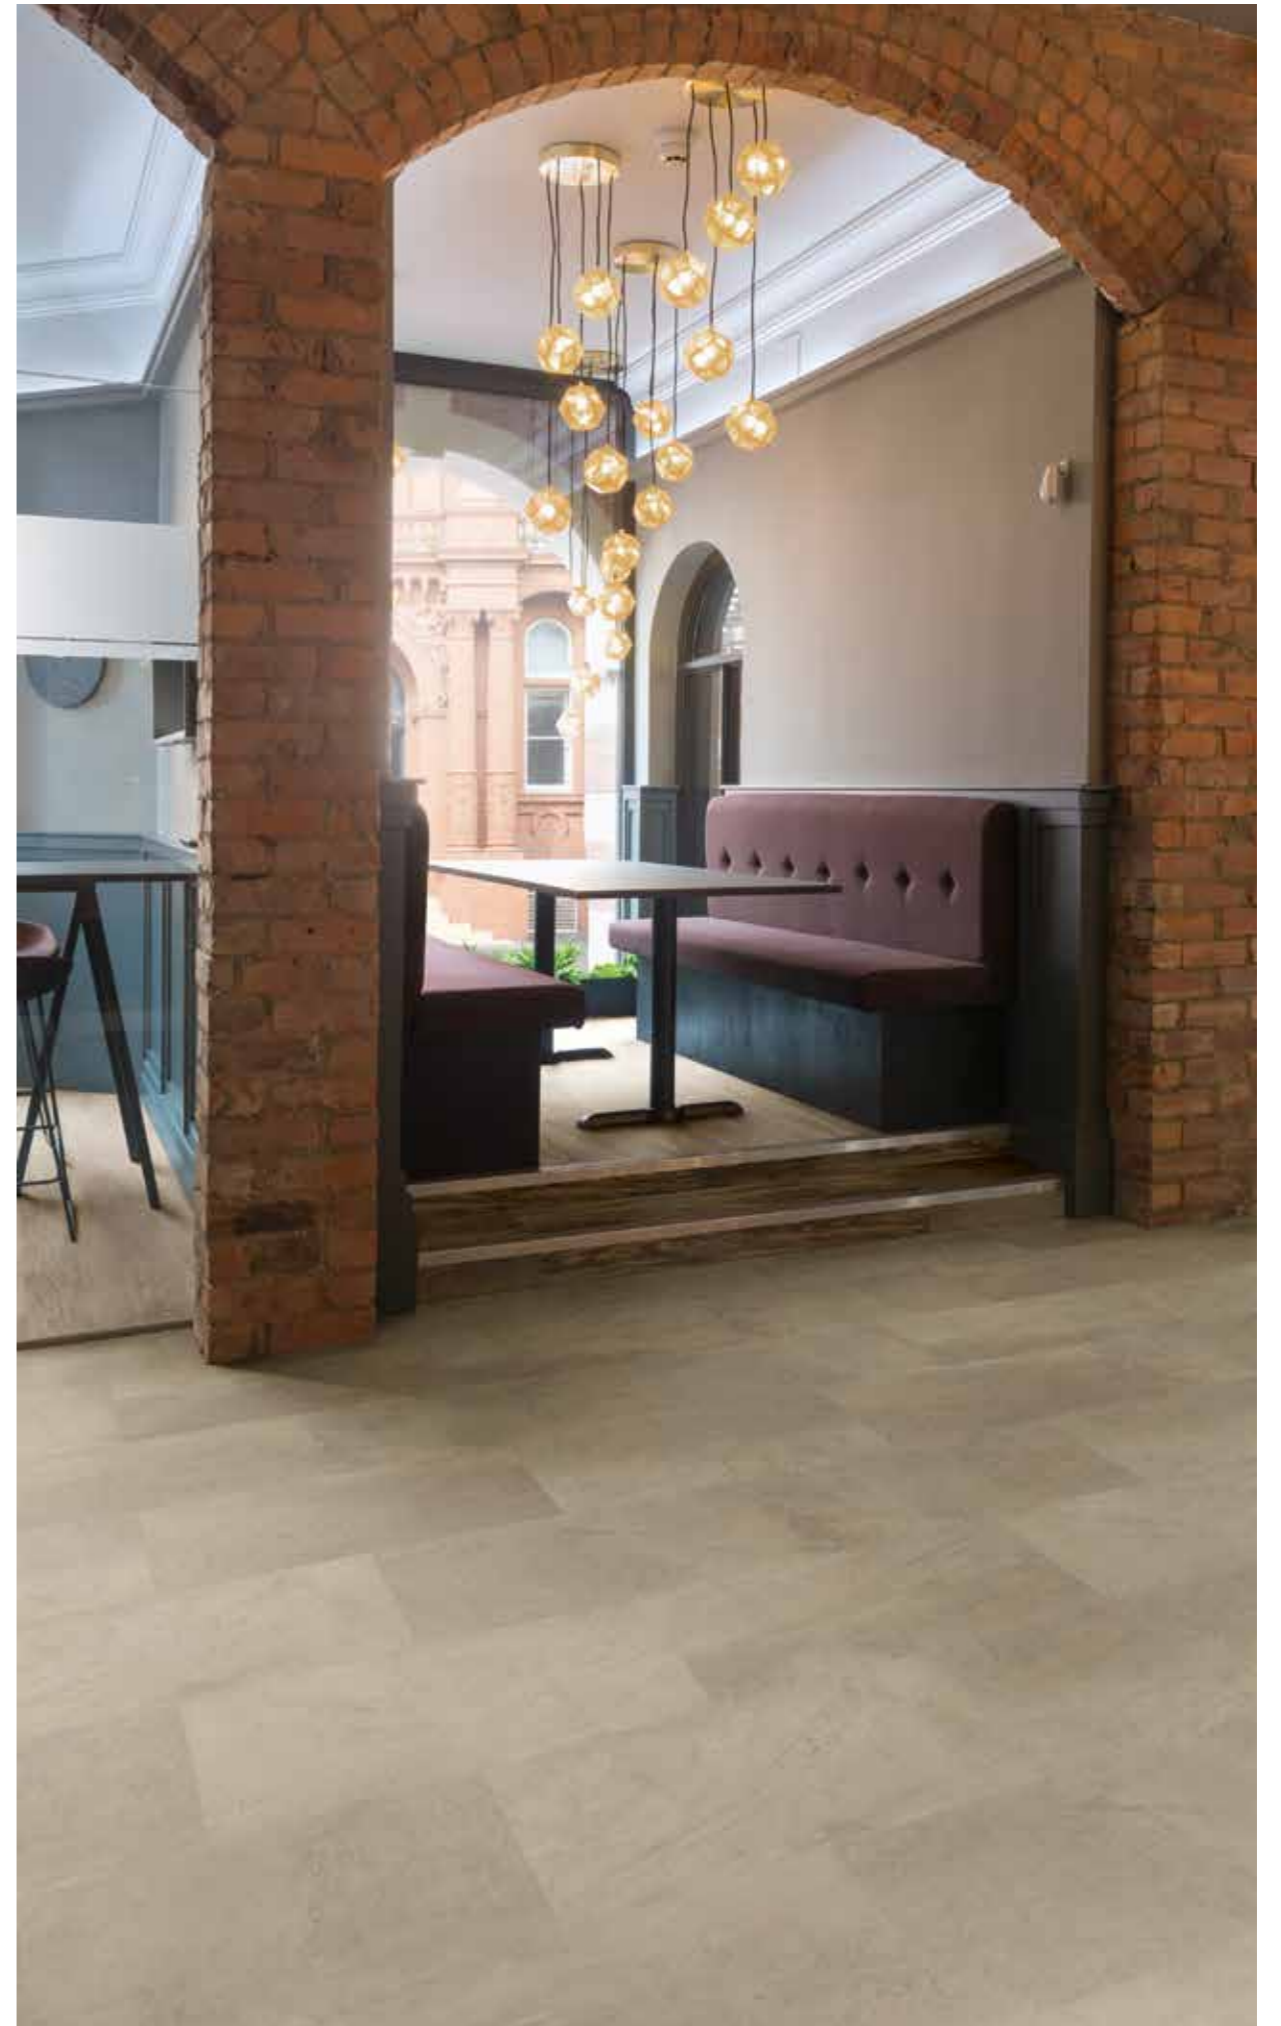

Crema – Broken Bond



# Planks & Tiles

Enhance the flow across a space with our easy-to-use planks and tiles.

304.8 x 609.6 mm (12 x 24")  
Ceramic Emboss  
Opal  
FS7S4380



152.4 x 914.4 mm (6 x 36")  
Artisan Emboss Wood  
Dusted Oak  
FS7W8520



184.2 x 1219.2 mm (7.25 x 48")  
Artisan Emboss Wood  
Strand Oak  
FS7W8620



177.8 x 1219.2 mm (7 x 48")  
Natural Wood Grain Emboss  
Barrel Oak Grey  
FK7W3300



235.0 x 1505.0 mm (9.25 x 59.25")  
Natural Wood Grain Emboss  
Barrel Oak Ashen  
FK7W3309






## Form Laying Patterns

Quickly design and specify elegant Form floors using our pre-designed laying patterns, available alongside our single planks and tiles.


### Small Parquet Available in Woods

Planks:  
228.6 x 76.2 mm (3 x 9")

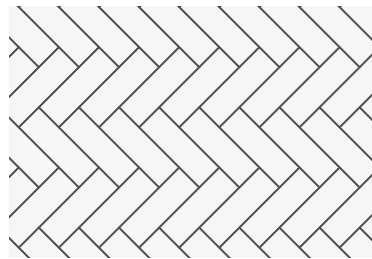

### Large Parquet Available in Woods


Planks:  
114.3 x 457.2 mm (4.5 x 18")

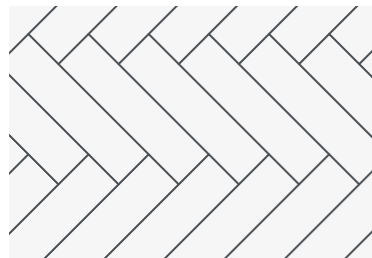

### Basket Weave Available in Woods

Planks:  
76.2 x 304.8 mm (3" x 12")


Key:  
114.3 x 114.3 mm (4.5" x 4.5")

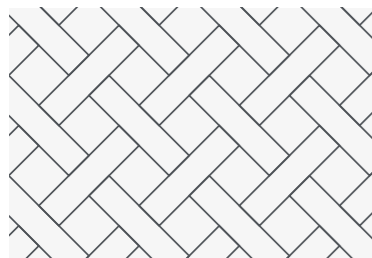

### Pavestone Available in Stones


Tiles:  
152.4 x 304.8 mm (6 x 12")  
304.8 x 304.8 mm (12 x 12")  
304.8 x 457.2 mm (12 x 18")

Stripping Sizes:  
3 x 915 mm (1/8" x 36")

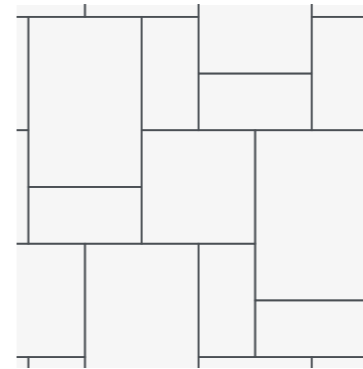

### Hex Available in Stones









Tiles:  
152.4 x 175.9 mm (6 x 6.9")

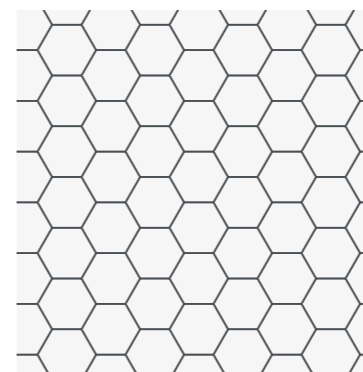



# Simple Patterns

Use Form's well-balanced size options to create impact quickly with simple, timeless pattern options.
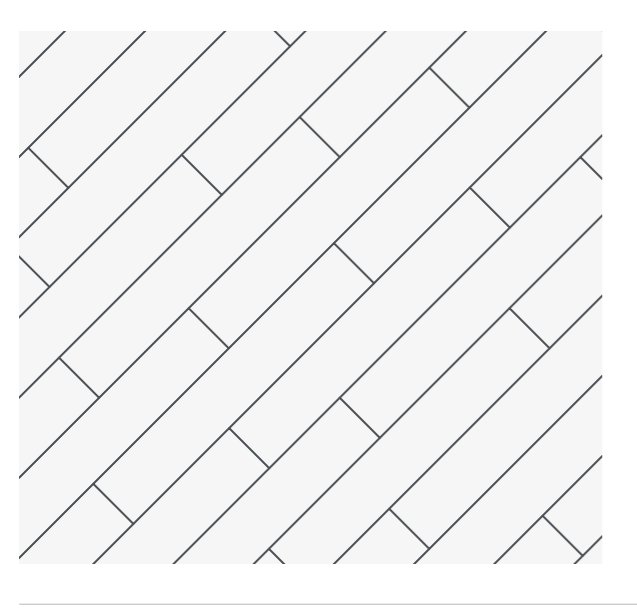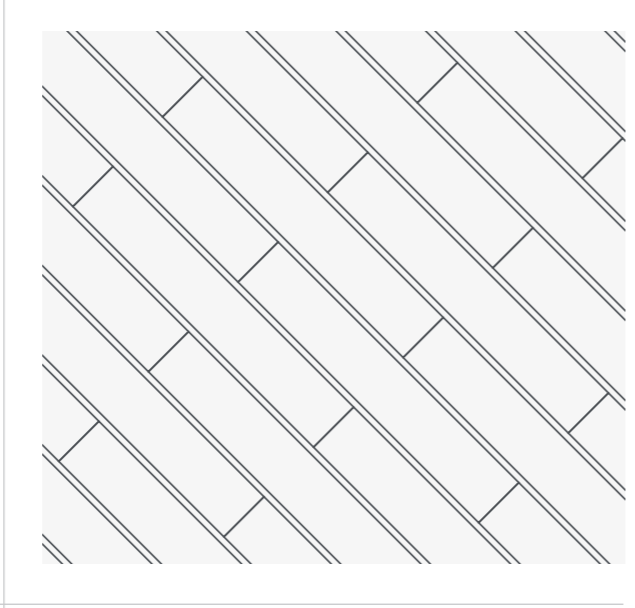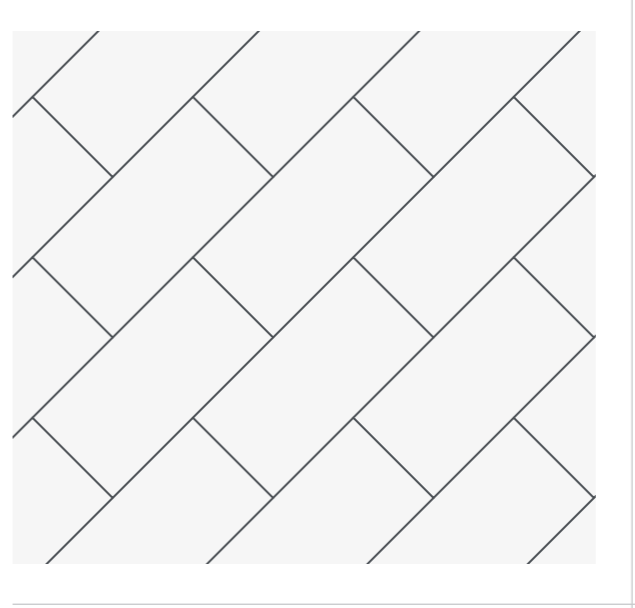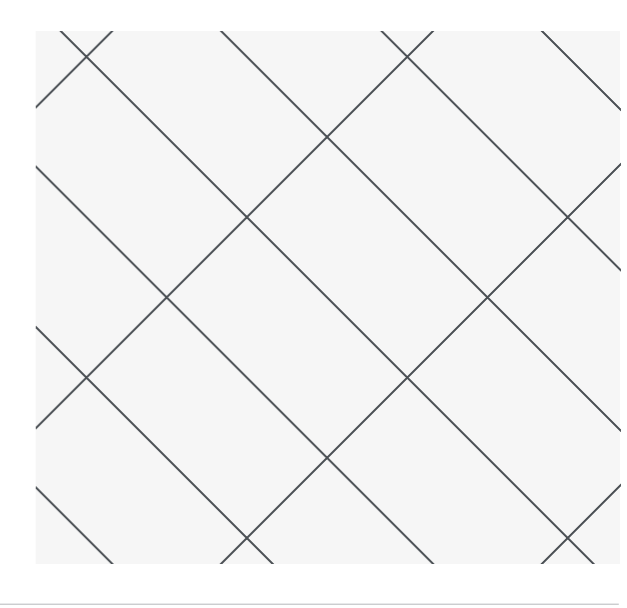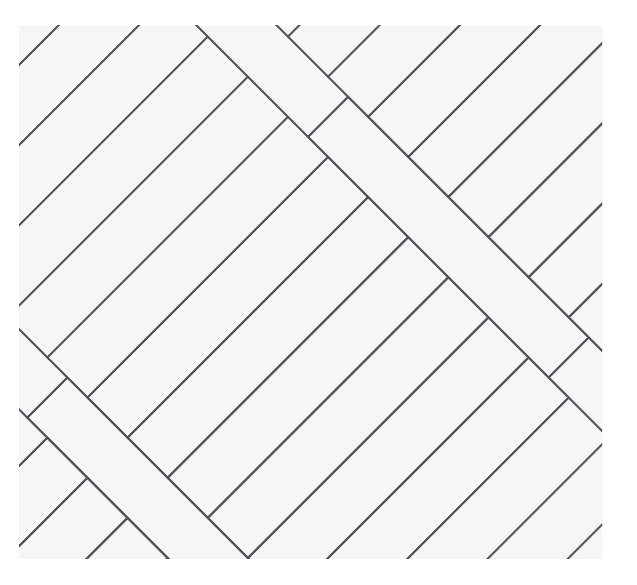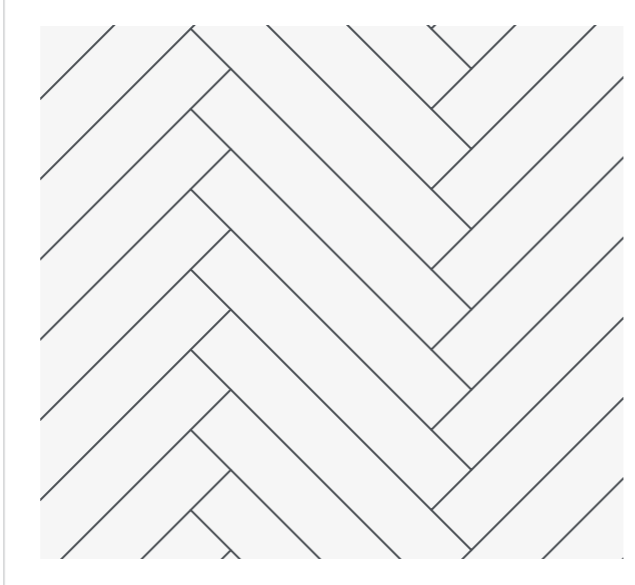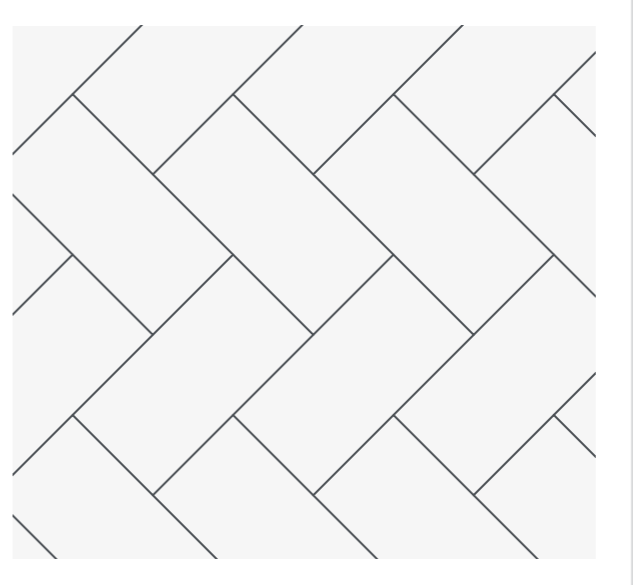
<p><b>Stripwood</b></p> <p>For Wood Plank sizes:          152.4 x 914.4 mm (6 x 36")          184.2 x 1219.2 mm (7.25 x 48")          177.8 x 1219.2 mm (7 x 48")          235.0 x 1505.0 mm (9.25 x 59.25")</p>	<p><b>Deck Block Featuring Stripping</b></p> <p>For Wood Plank sizes:          152.4 x 914.4 mm (6 x 36")          184.2 x 1219.2 mm (7.25 x 48")          177.8 x 1219.2 mm (7 x 48")          235.0 x 1505.0 mm (9.25 x 59.25")</p>	<p><b>Broken Bond Stripping optional</b></p> <p>For Stone Tile sizes:          304.8 x 609.6 mm (12 x 24")</p>	<p><b>Uniform Block Stripping optional</b></p> <p>For Stone Tile sizes:          304.8 x 609.6 mm (12 x 24")</p>
			
<p><b>Wicket</b></p> <p>For Wood Plank sizes:          152.4 x 914.4 mm (6 x 36")          184.2 x 1219.2 mm (7.25 x 48")          177.8 x 1219.2 mm (7 x 48")          235.0 x 1505.0 mm (9.25 x 59.25")</p>	<p><b>Herringbone Plank</b></p> <p>For Wood Plank sizes:          152.4 x 914.4 mm (6 x 36")          184.2 x 1219.2 mm (7.25 x 48")</p>	<p><b>Herringbone Tile Stripping optional</b></p> <p>For Stone Tile sizes:          304.8 x 609.6 mm (12 x 24")</p>	
			 <p>Get creative with our Room Visualiser</p> <p>Explore patterns and colours for your next project.</p> <p><a href="http://amtico.com">amtico.com</a></p>



# Finishing touches

Amtico stripping – add contrast, definition or create a grout effect.

Feature stripping is available in the following sizes\*:

3.2 mm x 914.4 mm

















6.4 mm x 914.4 mm

9.5 mm x 914.4 mm


12.7 mm x 914.4 mm

19.9 mm x 914.4 mm

\*Sizes shown are not actual size

	American Oak	AROW7050		Pure Plain White	AROAPN11
	Bronze	AROAMP18		Shimmer Denim	AROASE39
	Cirrus Air	AROW8100		Silver	AROAMP38
	Concrete Pale	AROSCN30		Stria Basalt	AROSMS43
	Fused Birch	AROW7500		Stria Sediment	AROSMS14
	Gold	AROAMP78		Stria Volcanic	AROSMS42
	Mirabelle Crème	AROSMB14		Wenge Wood	AROW7490
	Pure Plain Black	AROAPN22		Wild Walnut	AROW7620

Choose stripping that complements the tone and materiality of planks and tiles, then combine them together in one of our timeless patterns.

 Concrete Pale AROSCN30  
3.2 mm stripping represented in this example.

 Mineral FS7S4350



Laid in Uniform Block

Please note, Acoustic will not be available on any orders with stripping.



Mineral – Uniform Block & Concrete Pale stripping



## Projects: Novotel – Noisy Le Grand

The lobby space of this four star Paris hotel is its beating heart – a place where guests are greeted, where friends meet, enjoy a drink, and find time to work. A place of passage, a place of exchange, with a distinct atmosphere.


Technically, a heavy traffic floor was needed, however the designer had a clear vision – aesthetically the floor had to blend into the soft pastels of the decor, supporting without intruding. Barrel Oak Rye's knot-free, gently repetitive style matched perfectly with this ambition.



Location: Paris, France  
Sector: Hospitality  
Products & Laying Patterns: Barrel Oak Rye  
laid in Stripwood

We are satisfied with this flooring from an aesthetic point of view, in particular the luminous tone it gives off, but also regarding its qualitative and noble appearance, its robustness and finally its ease of daily maintenance.

William Ziegler, Director of Novotel  
Noisy le Grand

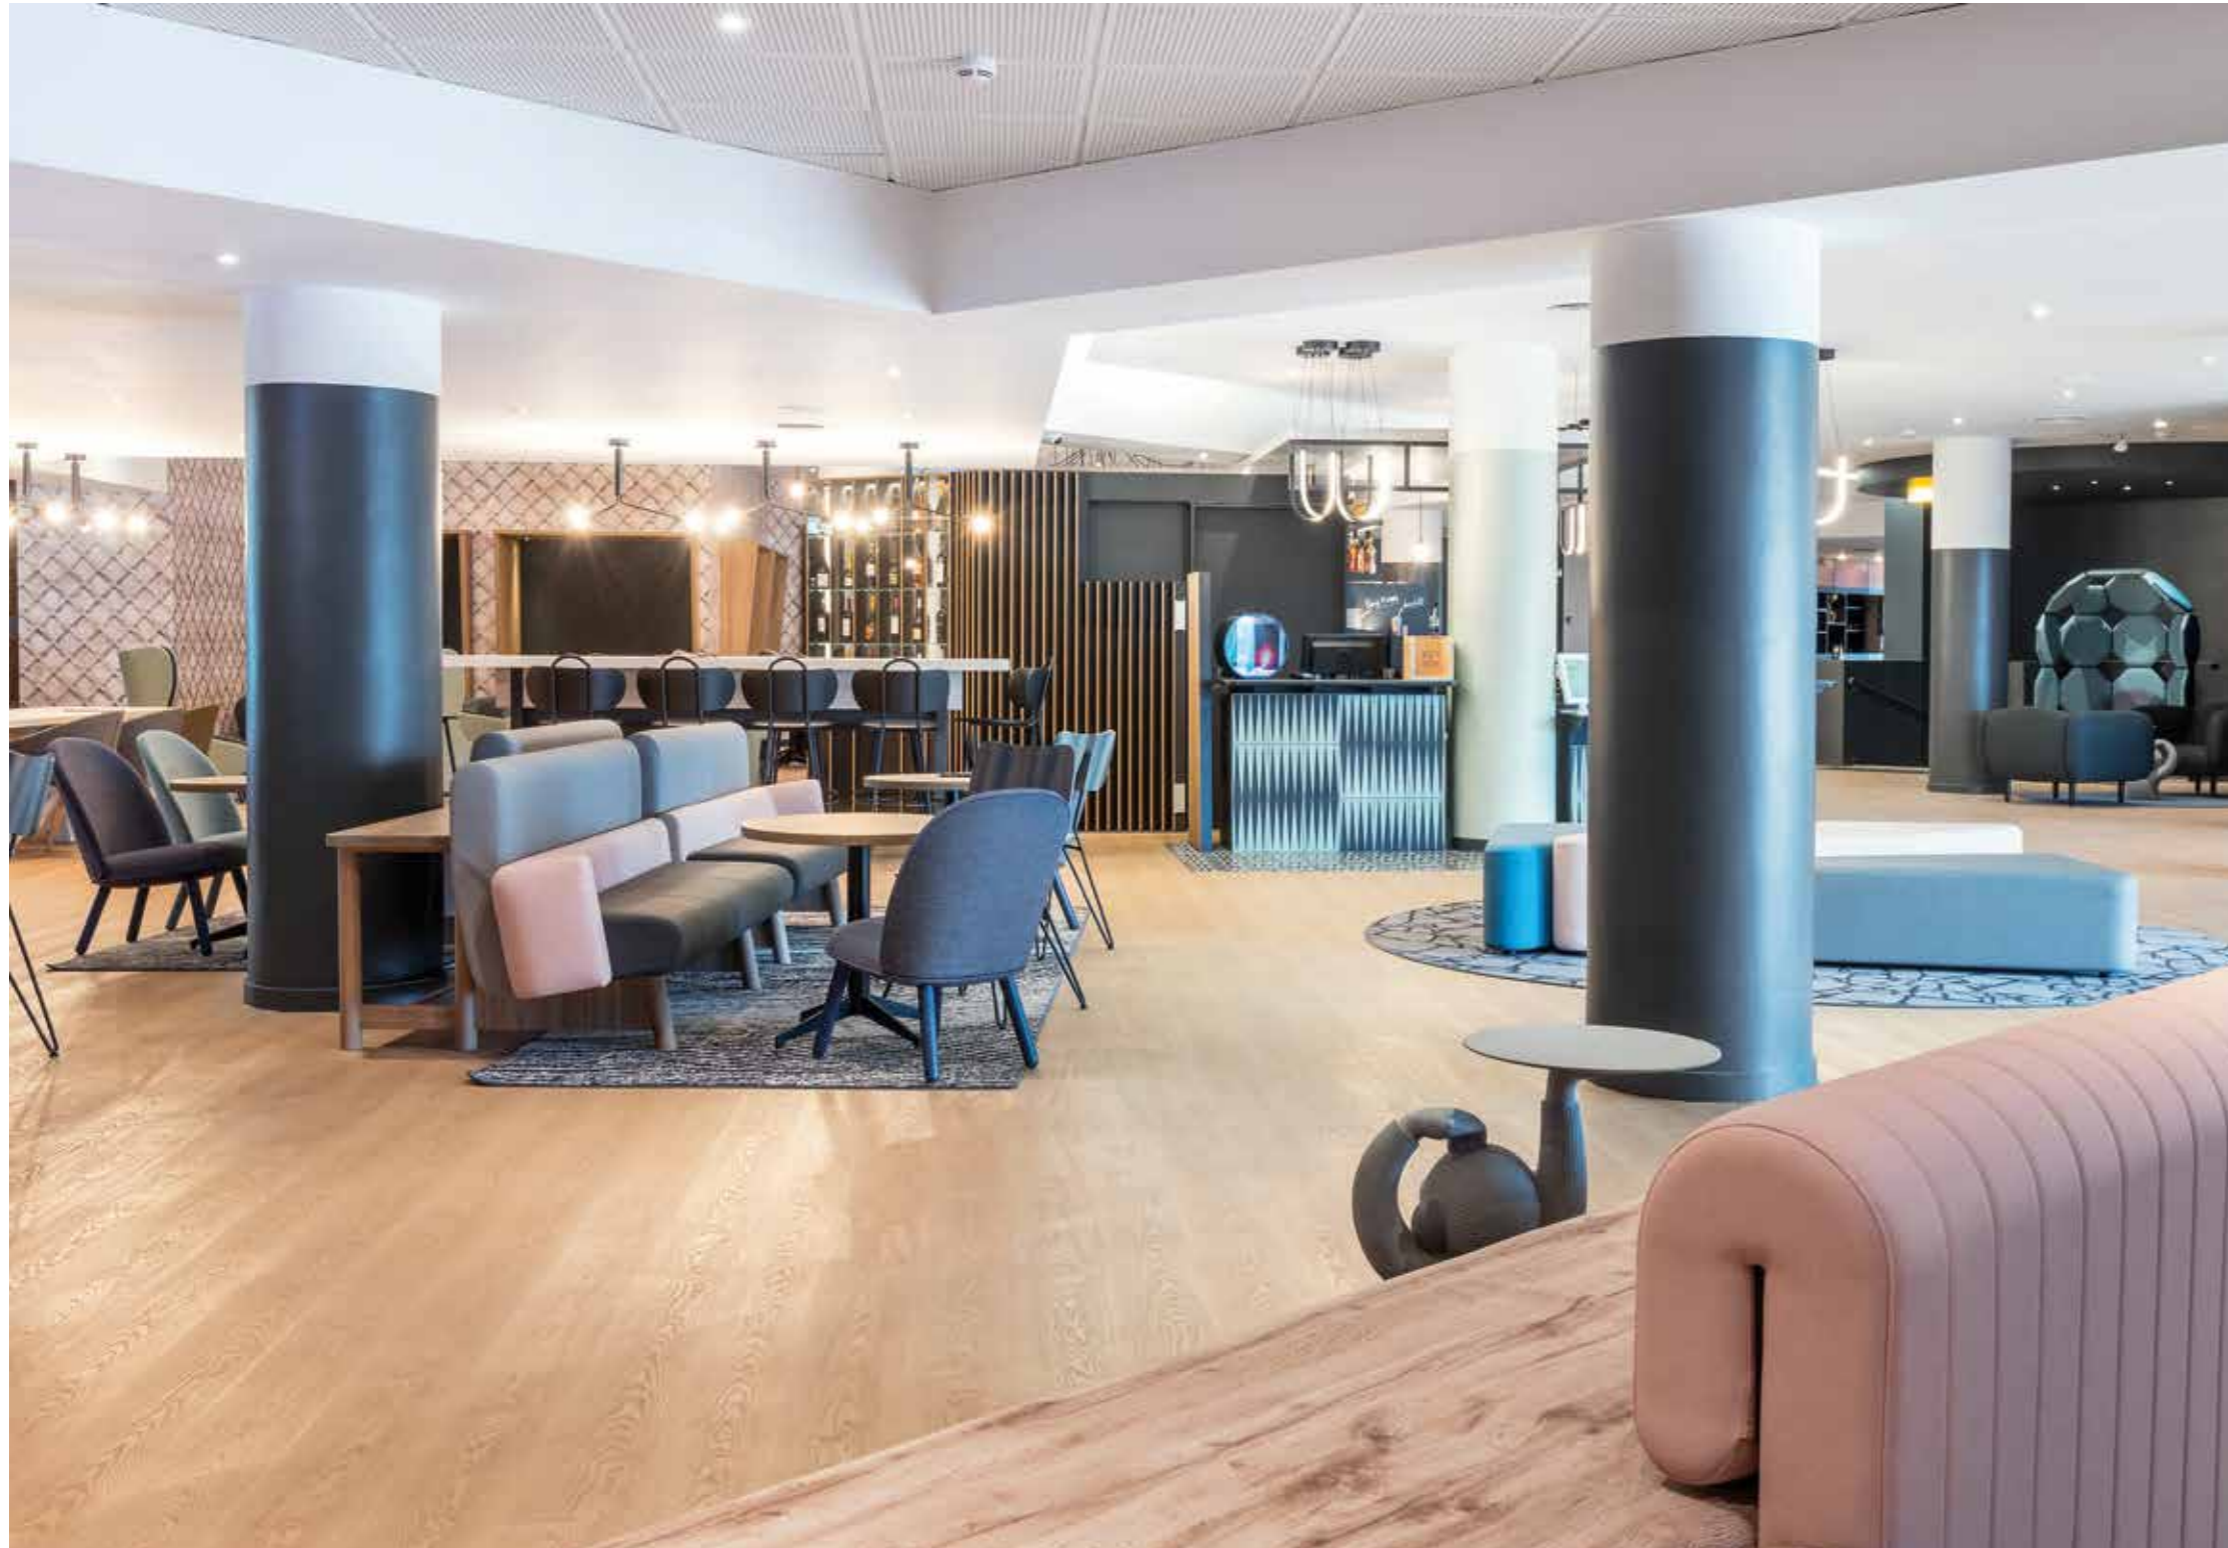

1300 m<sup>2</sup>  
LVT Footprint



## Projects: Lerch Day Care Centre

The design of this modern, adult care space focused on creating a sense of warmth and positivity for the 20 daycare guests, residents and office staff.

Barrel Oak Dune compliments the light-filled rooms with its sun-drenched tones, echoing the natural warmth. Barrel Oak Smoke's grey and cream tones and soft flowing wood grain helped to create a softer, Nordic-inspired look communal and administrative spaces.



Location: Schwendi, Germany  
Sector: Care

Products & Laying Patterns: Barrel Oak Smoke,  
Barrel Oak Dune laid in Stripwood  
Photography: ©Martin Duckek



The design and format selection was simply convincing and the installation went really well.

J.Ludescher Dipl.-Ing. (FH) Architect  
SBA Architecture and Urban Planning



780 m<sup>2</sup>  
LVT Footprint





## Built to perform

Amtico Form's 0.7 mm wear layer makes it suitable for heavy commercial and even industrial classification environments. It offers all the charm and character of natural materials, while being much lighter to handle on site and easier to clean and maintain in high-traffic environments.

Amtico Form is made using our world-leading Multiple Performance System – giving users underfoot comfort, unrivalled durability and a long lasting appearance.

**2.5** mm total thickness

**0.7** mm wear layer



12YR COMMERCIAL WARRANTY



ANTIMICROBIAL

We have included our brand new antimicrobial technology across the Form collection. This ionic silver additive has been proven to reduce bacteria<sup>1</sup> present on a floor by more than 99% over 24 hours.



Phthalate free



A low emission product



BREEAM rated



Made with 23% recycled content




Sound reduction<sup>2</sup>

<sup>1</sup> Independently verified against E.Coli and MRSA, to ISO 22196, showing a reduction of >99.9% after 24hrs. Also tested against SARS-CoV-2, to ISO 22196, showing an 85.5% reduction against an untreated control and a reduction of >99.9% against the initial inoculation after 24hrs.

<sup>2</sup> Sound reduction is achieved with products that feature Acoustic Backing.

<sup>3</sup> Form Natural Wood Grain Emboss designs (Barrel Oak) are produced with a standard urethane coating.

## Multiple Performance System

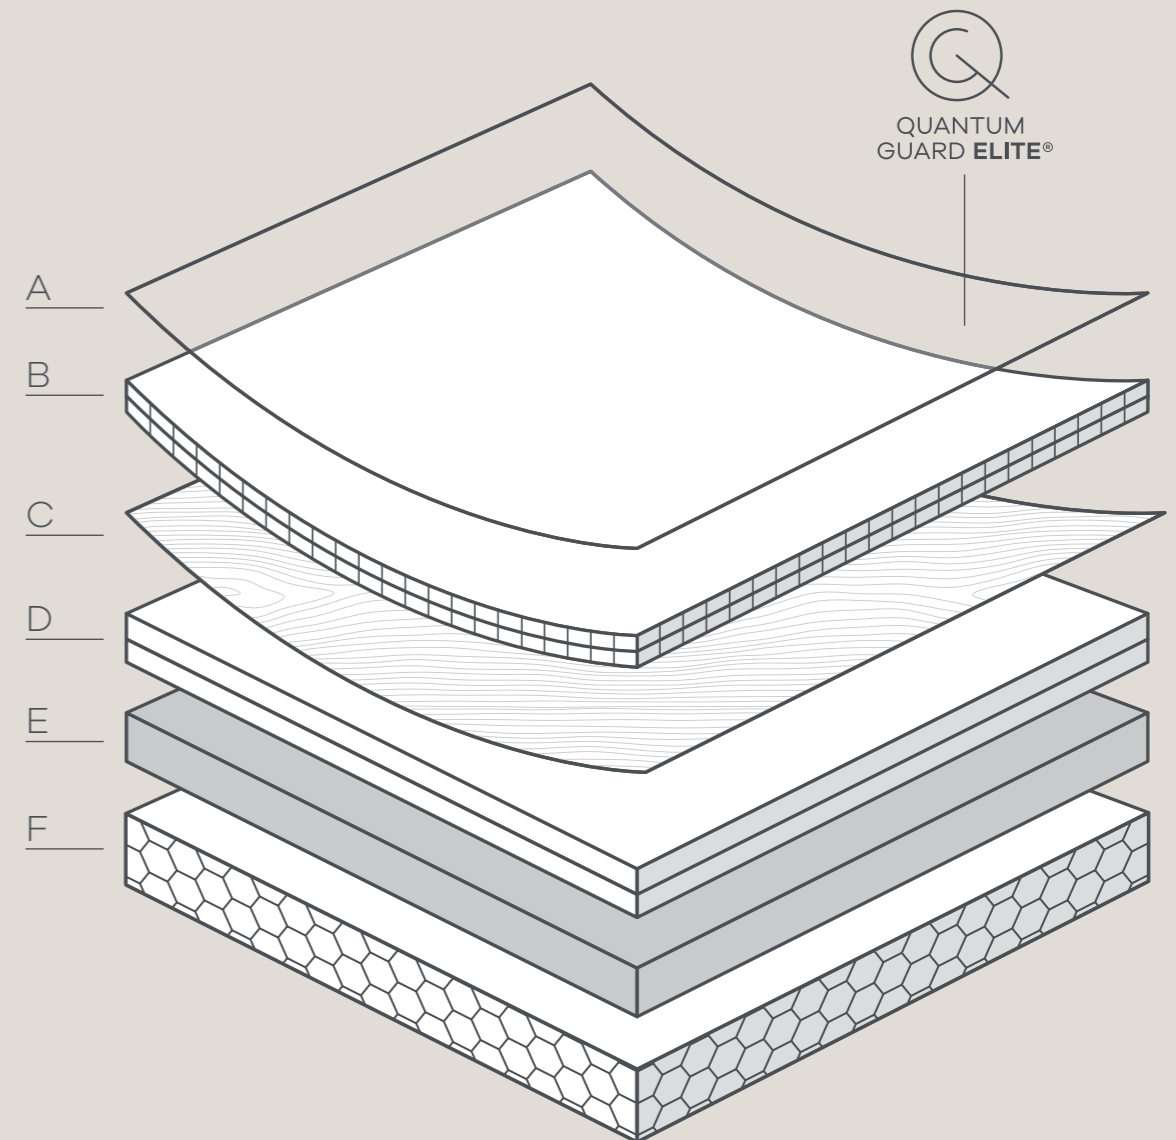

### A. Quantum Guard Elite<sup>3</sup>

Amtico's patented urethane formula provides superior durability and resistance against abrasions and stains. The reinforced low gloss finish is highly realistic.

### B. High density 0.7 mm wear layer

Toughened upper layer, giving excellent impact resistance and high clarity, with unique realistic embosses.

### C. Design layer

Carefully crafted print films create the distinctive Amtico Wood and Stone product designs.

### D. Core layer

Contains up to 32% recycled pre-consumer content.

### E. Backing layer

The foundation of the product which provides long lasting stability. Contains up to 30% recycled pre-consumer content.

### F. Acoustic backing layer (optional)

Reduces the impact sound by up to 19dB and provides an extra level of comfort underfoot.



# Product Availability

## Size & Specification

Product Name	Product Code	Surface Textures	Surface Coating	Straight Grain Planks				Straight Grain Tiles
				152.4 x 914.4 mm (6 x 36")	184.2 x 1219.2 mm (7.25 x 48")	177.8 x 1219.2 mm (7 x 48")	285.0 x 1505.0 mm (9.25 x 59.25")	304.8 x 609.6 mm (12 x 24")
<b>Woods</b>								
Amber Oak	FS7W8550	Artisan Emboss	Quantum Guard Elite	•	•			
Barrel Oak Ashen	FK7W3309	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Cotton	FK7W3302	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Dune	FK7W3307	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Grey	FK7W3300	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Rye	FK7W3303	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Sand	FK7W3304	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Smoke	FK7W3308	Natural Wood Grain Emboss	Urethane			•	•	
Bergen Oak	FS7W8510	Artisan Emboss	Quantum Guard Elite	•	•			
Bister Oak	FS7W8490	Artisan Emboss	Quantum Guard Elite	•	•			
Boardwalk Oak	FS7W8600	Artisan Emboss	Quantum Guard Elite	•	•			
Bureau Oak	FS7W5970	Artisan Emboss	Quantum Guard Elite	•	•			
Burnished Timber	FS7W9080	Artisan Emboss	Quantum Guard Elite	•	•			
Carved Oak	FS7W5960	Artisan Emboss	Quantum Guard Elite	•	•			
Cottage Limed Wood	FS7W5940	Artisan Emboss	Quantum Guard Elite	•	•			
Cowrie Oak	FS7W8590	Artisan Emboss	Quantum Guard Elite	•	•			
Dimmet Oak	FS7W8530	Artisan Emboss	Quantum Guard Elite	•	•			
Drift Oak	FS7W9020	Artisan Emboss	Quantum Guard Elite	•	•			
Dusted Oak	FS7W8520	Artisan Emboss	Quantum Guard Elite	•	•			
Eventide Oak	FS7W8540	Artisan Emboss	Quantum Guard Elite	•	•			
Fawn Oak	FS7W8480	Artisan Emboss	Quantum Guard Elite	•	•			
Gotland Oak	FS7W8470	Artisan Emboss	Quantum Guard Elite	•	•			
Kalmar Oak	FS7W8500	Artisan Emboss	Quantum Guard Elite	•	•			
Native Grey Wood	FS7W9060	Artisan Emboss	Quantum Guard Elite	•	•			
Rural Oak	FS7W5950	Artisan Emboss	Quantum Guard Elite	•	•			
Seaboard Oak	FS7W8570	Artisan Emboss	Quantum Guard Elite	•	•			
Shell Oak	FS7W8580	Artisan Emboss	Quantum Guard Elite	•	•			
Skerry Oak	FS7W8610	Artisan Emboss	Quantum Guard Elite	•	•			
Strand Oak	FS7W8620	Artisan Emboss	Quantum Guard Elite	•	•			
Valley Oak	FS7W9040	Artisan Emboss	Quantum Guard Elite	•	•			
<b>Stones</b>								
Cinder	FS7S4400	Ceramic Emboss	Quantum Guard Elite					•
Crema	FS7S4370	Ceramic Emboss	Quantum Guard Elite					•
Mineral	FS7S4350	Ceramic Emboss	Quantum Guard Elite					•
Opal	FS7S4380	Ceramic Emboss	Quantum Guard Elite					•
Sepia	FS7S4390	Ceramic Emboss	Quantum Guard Elite					•
Tidal	FS7S4340	Ceramic Emboss	Quantum Guard Elite					•

Products bevelled as standard. Please note all sizes and availability are correct at the time of press. Please contact your Area Sales Manager for the latest information.

# Packaging Information

## Standard Amtico Form

Details	Woods				Stones
	152.4 x 914.4 mm (6 x 36")	177.8 x 1219.2 mm (7 x 48")	184.2 x 1219.2 mm (7.25 x 48")	285.0 x 1505.0 mm (9.25 x 59.25")	304.8 x 609.6 mm (12 x 24")
Plank/Tile per Box	18	15	9	10	14
M <sup>2</sup> per Box	2.50	3.25	2.00	3.54	2.61
Weight (kg) per Box	8.92	14.19	7.40	15.57	9.32
Boxes per Pallet	72	60	90	56	72
M <sup>2</sup> per Pallet	180.00	195.00	180.00	198.24	187.92
Weight (kg) per Pallet	642	871	666	872	671

## Acoustic Amtico Form

Details	Woods		Stones
	152.4 x 914.4 mm (6 x 36")	184.2 x 1219.2 mm (7.25 x 48")	304.8 x 609.6 mm (12 x 24")
Plank/Tile per Box	14	7	10
M <sup>2</sup> per Box	1.95	1.57	1.86
Weight (kg) per Box	7.51	6.23	7.19
Boxes per Pallet	72	90	72
M <sup>2</sup> per Pallet	140.40	141.30	133.78
Weight (kg) per Pallet	540	561	518



# Technical Specification

Name	Standard	Symbol	Result Natural Wood Grain Emboss	Result Artisan Emboss Wood & Ceramic Emboss
CE / DOP	EN 14041		CPR/AI/013	CPR/AI/013
Usage Classification	EN ISO 10874		23, 34, 43	23, 34, 43
Manufacturing Standard	EN ISO 10582		Pass	Pass
Total Thickness	EN ISO 24346		2.5 mm	2.5 mm
Wear Layer Thickness	EN ISO 24340		0.7 mm	0.7 mm
Weight	EN ISO 23997		3,277 g/m <sup>2</sup>	3,450 g/m <sup>2</sup>
Abrasion Resistance	EN ISO 10582		Type 1	Type 1
Residual Indentation	EN ISO 24343-1		≤ 0.1 mm	≤ 0.1 mm
Dimensional Stability	EN ISO 23999		≤ 0.25%	≤ 0.25%
Dimensional Stability / Curling	EN ISO 23999		≤ 2 mm	≤ 2 mm
Slip Resistance	DIN 51130 EN 13893		R10* Class DS	R10* Class DS
Chemical Resistance	EN ISO 26987		Excellent	Excellent
Colour Fastness to Light	EN ISO 105-B02		≥ 6	≥ 6
Flammability/ Smoke Emissions	EN 13501-1		B <sub>fl</sub> -s1	B <sub>fl</sub> -s1
Castor Chair Resistance (Type W)	EN ISO 4918		Pass	Pass
Impact Sound Insulation	EN ISO 717-2		4 dB	4 dB
Thermal Resistance	EN 12664		0,016 m <sup>2</sup> K/W (underfloor heating suitable)	0,016 m <sup>2</sup> K/W (underfloor heating suitable)
Electrostatic Resistance	EN 1815		≤ 2 kV	≤ 2 kV
Emissions	IAC Gold		Cert No. IACG-352-01-12-2020	Cert No. IACG-352-01-12-2020
Emissions	French VOC Regulation		A+	A+
Emissions	M1		Certified. Published on <a href="https://cer.rts.fi/en/m1">https://cer.rts.fi/en/m1</a>	Certified. Published on <a href="https://cer.rts.fi/en/m1">https://cer.rts.fi/en/m1</a>
UPEC	U <sub>4</sub> P <sub>3</sub> E <sub>1</sub> C <sub>2</sub> Bois ou à base de bois U <sub>4</sub> P <sub>3</sub> E <sub>2</sub> C <sub>2</sub> Chape ciment ou béton		N/A	UPEC-Certificate 326-003.1
Environment	BRE Green Guide		Comparable to Green Guide generic elements 821570039 and 821570066 rated as A+/A.	Comparable to Green Guide generic elements 821570039 and 821570066 rated as A+/A.
Phthalate Free			Yes	Yes
Surface Treatment			Urethane	Quantum Guard Elite

For Form Acoustic please refer to the Form Acoustic technical specification on [amtico.com](http://amtico.com)  
\* for safety flooring with long-term retention of slip resistance refer to Amtico Signature 36+ and Amtico Spacia 36+.

# Installation

The Form Collection has been designed for straightforward installation. To achieve the best application of Form follow these floor preparation and installation guidelines.



## Intended Use

- Amtico Form products are recommended for use over properly prepared concrete, suspended wood, metal and other suitable substrates.
- Do not install Amtico Form products until the subfloor is prepared and the work of all other trades is complete.
- Amtico Form products can be used with radiant under-floor heating systems, but note that the surface temperature of the subfloor must not exceed 27°C (81°F).
- Amtico Form products are not intended for outside use.

## Material Receiving, Handling & Storage

- Ensure materials delivered are the correct style, colour, shade and quantity; check tiles for visual defects.
- Report discrepancies immediately.

## Jobsite Testing & Subfloor Preparation

- The building must be sealed with stable environmental conditions.
- Subfloor must be clean (free of dirt, old adhesives, paint, grease, wax or other contaminants that may stain or prevent adhesion), smooth, flat, sound, fit for purpose and free of movement and excess moisture.
- Test concrete for moisture content (country specific) or relative humidity in accordance with national regulations.
- Readings above the maximum permitted require the use of a surface damp proof membrane or adequate time for the floor to dry to an acceptable standard. Record test results and corrective action(s). Documentation is required for processing claims.
- Bring the subfloor to an acceptable condition using appropriate smoothing and levelling compounds. For wood subfloors use approved underlayment panels. Install surface preparation materials according to the manufacturers' instructions and ensure a smooth surface to prevent any irregularities or roughness from telegraphing through the new flooring.

## Installation Procedures

- Inspect each tile for visual defects before installing.
- Installation of flooring implies acceptance of materials.
- Acclimatise Amtico Form products, adhesive and subfloor to a stable condition between 18°C-27°C (64°F-81°F) for a minimum of 24 hours before, during and after installation. For best results and in particular when extreme temperature conditions exist, increase the acclimatisation to a minimum of 48 hours.
- Apply recommended Amtico adhesive according to label instructions. Adhesive selection should be appropriate to site conditions – see adhesive labels for more detailed information. Amtico will not be held responsible for any installation complaints if a non-recommended adhesive is used.
- The floor must be rolled using a 45 kg three-section roller in both directions.
- The finished floor should be protected from point loads and heavy traffic for 24 hours after installation and should not be washed for 48 hours.

## Routine Maintenance

- Daily sweep or dust mop the floor and clean up all spills immediately.
- Perform damp mopping or machine cleaning (<450 rpm) as necessary. For routine everyday cleaning, use Amtico Maintainer or equivalent.
- When machine cleaning, use a 3M red pad or equivalent.
- Avoid cleaners that contain abrasives or solvents that may permanently damage the floor.

## Periodic Maintenance

- Use stripper to remove ground in-dirt and old or worn coats of dressing.
- Dressings can be applied if desired or as necessary. Follow the instructions for proper usage and application.

## Caution

When kept clean and dry, Amtico Form products have excellent slip-resistant properties. However, in common with other smooth floor coverings, water, other liquids, grease and other contaminants on the surface of the floor can make them slippery.

For further technical information please visit [amtico.com/commercial/technical](http://amtico.com/commercial/technical)



## Accreditations

Our ethos is to combine creativity and innovation with the highest levels of quality – design, manufacturing, product and service.

	<p>Amtico Form has been certified to achieve the M1 building materials emissions classification for indoor air quality from the Finnish Information Foundation RTS.</p>		<p>Amtico Form products have been UPEC classified, therefore conforming to local French certification.</p>
	<p>Amtico is a member of the professional association for flexible floor covering manufacturers in Germany.</p>		<p>The CE mark is a confirmation by Amtico that our products are in compliance with European health, safety and environmental requirements (as required by Council Directive 89/106/EEC and detailed in EN 14041).</p>
	<p>Our quality system complies with BS EN ISO 9001 and is certified by LRQA.</p>		<p>The UKCA mark is a confirmation by Amtico that our products meet the UK Regulations as defined in the relevant Statutory Instruments (SIs).</p>
	<p>Amtico Form products are third-party certified for low-VOC emissions contributing towards good indoor air quality.</p>		<p>Amtico International GmbH is a member of the DGNB German Sustainable Building Council.</p>
	<p>Amtico Form products are manufactured using both phthalate-free and bio-based plasticisers except for recycled content.</p>		<p>Amtico products comply with BSI ISO 14001 environmental standards.</p>
	<p>Amtico Form complies with Indoor Air Comfort Gold version 6.0 and is certified as a low-emissions product contributing to a healthy indoor environment.</p>		<p>SOL PVC Pro is the French professional organisation of PVC flooring manufacturers; standing for their shared values and commitments related to environment, comfort, regulation and communication. Amtico International partenaire de <b>Sols Pvc<sup>PRO</sup></b></p>



# amtico flooring

## **Amtico UK & European Sales**

Solar Park Southside  
Solihull, West Midlands  
B90 4SH, UK  
+44 (0) 121 745 0800  
samples@amtico.com

## **South European Sales**

Español: +34 (0) 911 14 74 42  
English: +44 (0)1217450842  
Sales.southeurope@amtico.com  
Samples: info@amtico.de

## **Amtico Head Office**

Kingfield Road  
Coventry  
CV6 5AA, UK  
+44 (0) 24 7686 1400  
samples@amtico.com

**amtico.com**

## **Amtico International Germany**

Im Taubental 11  
41468 Neuss, Germany  
+49 (0) 2131 359 16 0  
info@amtico.de

## **Amtico International France**

36 Avenue Hoche  
75008 Paris, France  
+33 (0) 1 55 38 95 70  
info@amtico.fr

## **Amtico International AB**

S:t Olofsgatan 11A  
753 21 Uppsala  
Sweden  
+46 (0) 8 584 233 24  
info@amtico.se

## **Amtico International Asia**

Rm 2003  
20/F OfficePlus @ Wan Chai  
303 Hennessy Rd, Hong Kong  
+852 2327 7703  
samples@amtico.com

## **Amtico International Middle East, Africa & India**

8th Floor  
Building Number 2  
J&G DMCC, Dubai, UAE  
+971 (0) 50 192 33 46  
samples@amtico.com

## **Amtico International Pty Ltd Australia & New Zealand**

Unit 1, 40 Mill Street,  
Yarrabilba 4207  
Australia  
australia.customerservice@amtico.com

Visit [amtico.com](http://amtico.com) for more information on our product range, inspiring ideas, maintenance and installation advice. Every effort is made to achieve accurate reproduction of products in this brochure, however printing limitations can be misleading. Selection of products should be made from actual samples. Samples are small pieces cut from standard tiles. They give only a general indication of the design. Tone and shading can vary slightly from batch to batch and it is not possible to guarantee that the sample will exactly match the material supplied. The policy of the Company is one of continuous development and improvement and the right is reserved to add or delete from the range or change patterns without prior notification. All metric sizes are rounded. All products are manufactured in line with EN ISO 10582 and EN1307. Brochure correct at the time of printing.